






光缆示意图  
Optical cable Diagram

A端/Side A

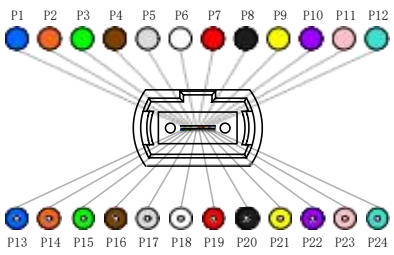

B端/Side B

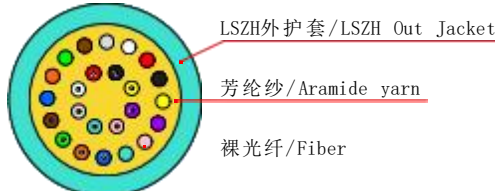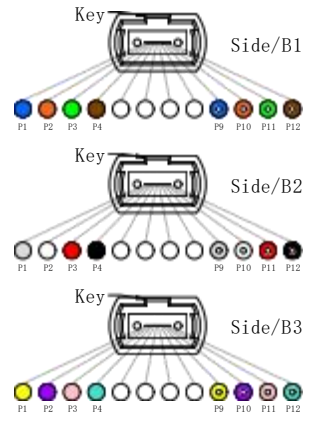

24C-3*8C Type:A Fiber Connectivity																								
Side/A MPO-24	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24
Fiber Colour	BL	OR	GR	BR	GR	WH	RE	BL	YE	PU	PI	AQ	BL	OR	GR	BR	GR	WH	RE	BL	YE	PU	PI	AQ
Side/B1 MPO-8	P1	P2	P3	P4	—	—	—	—	—	—	—	—	P9	P10	P11	P12	—	—	—	—	—	—	—	—
Side/B2 MPO-8	—	—	—	—	P1	P2	P3	P4	—	—	—	—	—	—	—	—	P9	P10	P11	P12	—	—	—	—
Side/B3 MPO-8	—	—	—	—	—	—	—	—	P1	P2	P3	P4	—	—	—	—	—	—	—	—	P9	P10	P11	P12

光缆参数 Cable Parameters		
光纤芯数 Fiber Core	24C	
光纤规格 Fiber Type	MM/OM3-50/125um	
工作温度 Operating Temperature	-40~70℃	
衰减 Attenuation	≤2.3dB/km@850nm	
外护套 Outer Jacket	外径 Dimension	3.0mm
	材料 Material	LSZH
	颜色 Color	青绿/Aqua
拉力 Tension	短期 Short term	300N
	长期 Long term	150N

连接器参数 Connector Parameters	
A端连接器型号/Connector Type A	MPO/UPC/F/OM3/24C
标损 Elite Loss	≤0.85dB
低损 Standard Loss	≤0.55dB
B端连接器型号/Connector Type B	MPO/UPC/F/OM3/8C
标损 Elite Loss	≤0.75dB
低损 Standard Loss	≤0.35dB
回损 Return Loss	≥30dB
基准波段 Tesr Wavelength	@850nm
可重复性 Repeatability	≤0.2dB
互换性 Interchangeability	≤0.2dB
插拔次数 Durability	800~1000
工作温度 Operating Temperature	-40~75℃